


Rubex

Parts and Instructions

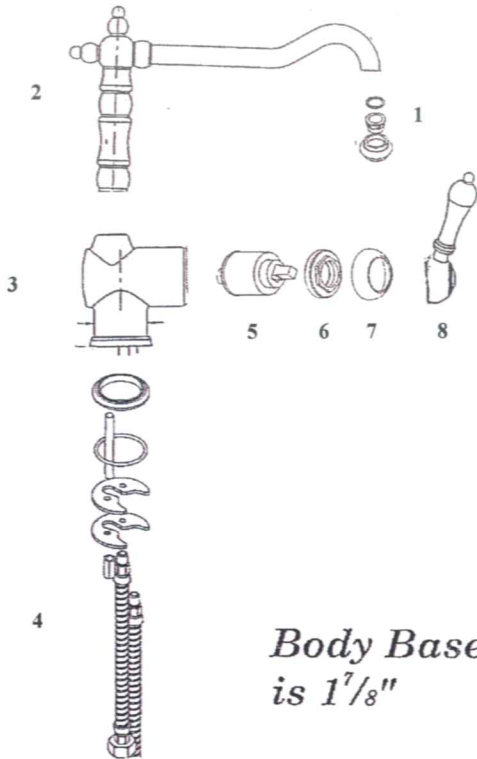

N9008 SERIES

#	Part No.	Description
1	N9008-1064	Aerator
2	N9008-1040	Spout
3	N9008-B	Body
4	N088	Braided Supply Hoses
5	9000-2003	Ceramic Cartridge
6	9000-2003R	Cartridge NUT
7	800-6200F	Cartridge Flange
8	N9008-6010	Lever Handle

Note: -Above Part Numbers for Chrome Finish
-Please Note Faucet Finish When Ordering Parts

Important

In order to comply with the CSA Regulation B125; the faucet must be installed so spout outlet is 1" above tub lip.

Imported by:

Trans-Atlantic Import Co. Inc.

Toll Free 1-800-661-8295

Email: taic@incentre.net

Care and Maintenance

Minimum maintenance is required to maintain product finish. With proper maintenance your **Rubex** faucet will continually look like new. Special care should be taken when cleaning your Faucet and the following suggestions should help extend your Faucet life.

A) Cleaning should be done regularly using a soft cotton cloth and warm water; then towel dry.

B) Do not use cleaners that contain abrasives or harsh chemicals; care should be taken in selecting cleaning supplies. Many cleaners contain detergents, ammonia, or other corrosive solvents that could damage your faucet finish.

C) Occasionally clean with a non-abrasive wax polish.

Warranty

TAIC warrants the original purchase for Limited Life Time Warranty from original date of purchase that the product will be free of any manufacturing defects. Product will be replaced at no charge provided it has been installed in accordance to **TAIC Installation Instructions**, used as recommend and not damaged due to misuse, abuse, faulty maintenance, accident or other damage. **TAIC** is not responsible for replacement labor costs, or shipping charges, or damage incurred during installation, removal, repair, or replacement of any **TAIC** product.

Rubex

N9008 SERIES

Mounting Instructions



1. Attach hot and cold flexible Supply tubes to Faucet body. Do not over tighten tubes, as damage may occur to "O" ring.
2. Thread Stud into Faucet body. Position large "O" ring in groove at Faucet base.
3. Faucet is now ready to install. Insert Flex hoses through hole in Sink or Counter. Place shaped Rubber washer over threaded Stud. Then Metal washer, using brass Tie down nut, tighten until Faucet is secure.

!!!IMPORTANT!!!

4. Once installed, remove Aerator and flush Faucet and Lines. This will remove any debris that may be trapped.

#	<u>Description</u>
16	Base plate
17	Union Bolt / Nut
18	"O" ring
19	Metal washers
20	Rubber washers
21	Nut